


PTE0233 Touch Keypad

Installation Guide


1. Open the case front and lift out the tablet. Disconnect the usb cable.



2. Screw the case back to the wall, bringing KeypadBus and power supply cables through the bottom or side entry.

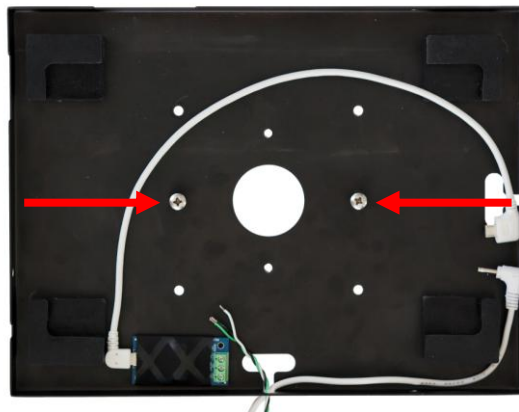

3. Connect KeypadBus Data, +12V, and Ground cables to the screw terminals.
4. Connect the power supply and usb cables. Replace the tablet.

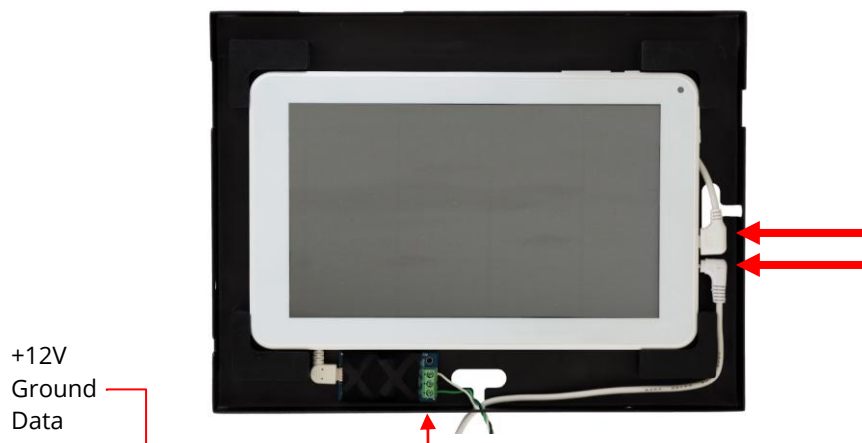



5. Long press the power button to switch the keypad on.



6. Replace the case front and secure with torx screws.

