

## PET500 Electric Fence Energizer

PTE2248

### Overview:

The PET500 Electric Fence Energizer makes animal control a breeze. Its small rugged design makes it ideal for strip grazing and portable animal control, but it also packs enough punch to be great in small permanent electric fence setups.

### Features:

- Simple, safe and easy to setup
- 12v Battery, Mains or Solar powered\*
- Small size makes it great for portable use
- Reverse battery protection
- Highly efficient and intelligent digital circuit
- Warns you when the battery is low
- Power surge protection
- UV stable enclosure
- Ant and moisture protection

\*PTE2275 Solar Kit available separately

### Specifications:

<b>Output</b>	Peak Voltage:	9.5kV
	Peak Stored Energy:	500mJ
	Peak Output Energy:	800mJ
<b>Power</b>	Volts:	12.5V
	Current:	60mA
<b>Size</b>	Height:	127mm
	Width:	80mm
	Depth:	53mm
<b>Weight</b>	Product:	380g
	Packed:	780g



### Package Contents:

- PET500 electric fence energizer
- Battery leads
- Mains power adapter
- Fence Leads
- Instructions

### Warranty:



3 Year manufacturer warranty\*

\* excluding lightning damage

### For more information:

See the website at: <http://www.jva-fence.com.au>

## Voltage and Energy Output Graphs:

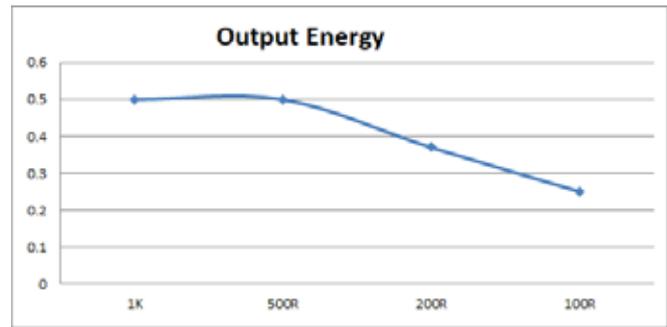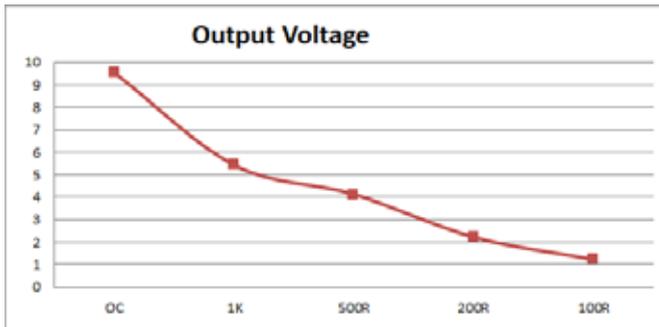

## Safety Standards:

The PET500 Electric Fence Energizer is certified to conform to all applicable international safety standards, including IEC 60335.2.76, and EMC compatibility 2004/108/EC. Copies of certificates are available upon request.

## Other JVA Agricultural Products:

	Joules	MBS - Mains, Battery, Solar	Solar / Rechargeable
<b>Small</b>	Up to 1	PET Series	SV Series, RSG1
<b>Medium</b>	Up to 8	MBX Series	*
<b>Large</b>	Up to 24	MBxL Series	*
<b>Other</b>	PowerProbe® Fault Finder IP Monitor® remote fence monitoring Fence Station® monitored exclusion fencing		

\*solar kits available separately

## Dimensions:

